


# SM1P Helmet Mount Quick Start Guide



# FITTING INSTRUCTIONS

## 1 FITTING AND ADJUSTING HARD HAT OR HELMET

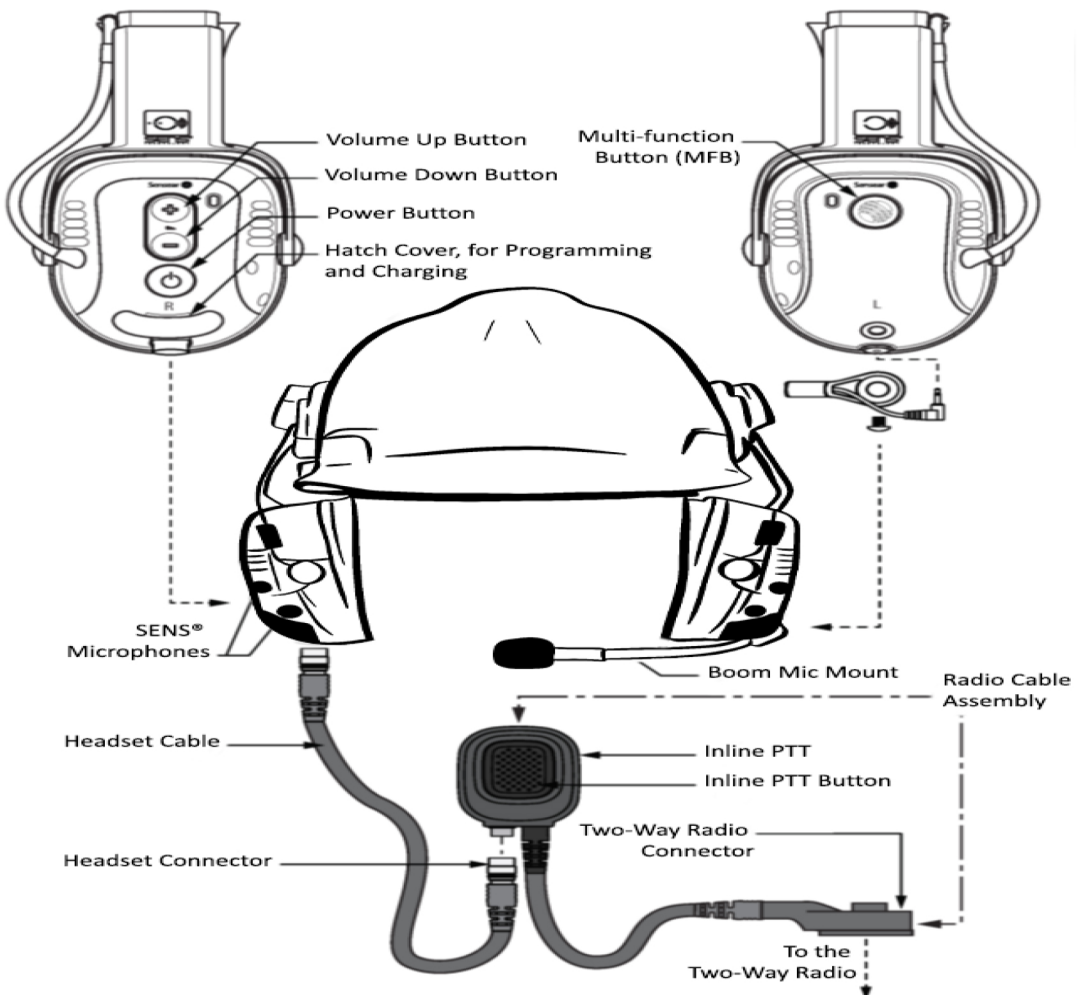

Make sure the helmet sits properly on your head. Choose the correct size for your head.\*




\*Please refer to the helmet manufacturer's instructions for fitting.


Adjust helmet ratchet to fit snug and comfortably.




## 2 HELMET MOUNT ADAPTORS (3 different sets included. Use correct adaptor for your style of helmet - see styles below.)



SMHA0000 - MSA V-Gard®



SMHA0001 - Protector AISafe



SMHA0002 - Protector Tuffmaster


## ATTACHING HELMET MOUNT ADAPTORS




Insert helmet mount headset muffs into helmet adaptors. They will slide and snap in.




Insert adaptors into helmet or hard hat until they snap in.



Swivel headset around to face forward.



## 3 ADJUSTING EARMUFF FIT



Snap helmet mount forks in by placing pressure on each side with your palms. Pressure should be applied at fork angle.



Adjust fit on ear by bracing adaptor with one hand and pulling the earmuff down or up with your other hand. Earmuffs should fit snugly on ears with no gaps. Ear cushions should be slightly compressed when worn correctly. If wearing safety glasses, put them on before adjusting earmuffs.

## 4 WEARING HELMET MOUNTED HEADSET



Front view



Side view




Back view

# QUICK SETUP GUIDE

## BASIC HEARING PROTECTION


**1** POWER ON/OFF (right earmuff)



Short press to power on. Long press to power off.


Full or partial charge, LED flashes green.  
Low charge, LED flashes red.

**2** SENS VOLUME (right earmuff)



Adjust SENS® audio levels with volume buttons.


**3** TURN SHORT-RANGE OFF (right earmuff)



Turn off short-range unless utilizing for small work groups. Short press volume up and down buttons together to toggle off.


## ENABLING SHORT-RANGE

**1** SHORT-RANGE ON/OFF (right earmuff)




Short press volume up and down buttons together to toggle on/off.

**2** SHORT-RANGE TRANSMIT (left earmuff)



Press and hold multi-function button to PTT over short-range.


**3** SHORT-RANGE CHANNELS (right earmuff)



Long press volume up or down button to change FM channels.


## ENABLING BLUETOOTH (Blue LED is solid in pairing mode and blinks slowly when paired. Short-range must be off when pairing.)

**1** BLUETOOTH PAIRING (left earmuff)




Press and hold multi-function button to put headset into pairing mode. "Bluetooth discoverable" when pairing, and connection tone when paired.

**2** BLUETOOTH - PHONE CALLS (left earmuff)



Answer call by pressing and releasing MFB. Reject call or end call by pressing and holding MFB.


**3** BLUETOOTH - TWO-WAY RADIO (left earmuff)




Transmit using the radio's PTT. For some devices, MFB will perform as a Bluetooth PTT (if short-range is off).

## CABLING TO TWO-WAY RADIO

**1** TWO-WAY RADIO CONNECTION



When cabling to two-way radio, make sure radio is off when connecting cable to headset. Connect the Hirose end to the headset and the pin-out end to the radio. Then turn on the radio. Adjust volume with radio's volume controls. Push-to-talk with the cable's inline PTT or via the radio's PTT button.

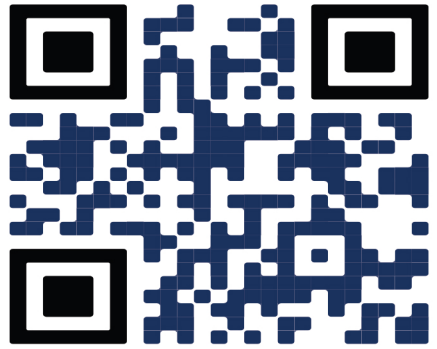

[sensear.com/product-manuals](http://sensear.com/product-manuals)



Sensear Pty Ltd  
4 Hehir Street  
Belmont, WA, 6104  
Australia  
Toll-Free: 1-300-859-120

Magnum Electronics, Inc.  
927 Horsepond Rd,  
Dover, DE 19901  
302-734-9250

Sensear Inc.  
150 South Washington St  
Suite C  
Carpentersville, IL 60110  
United States  
Toll-Free: 1-888-973-6732

[sensear.com](http://sensear.com)